

ORIENT

Photocoupler

Product Data Sheet



Name: OR-10XX

Customer: _____

Date: _____

:

1.

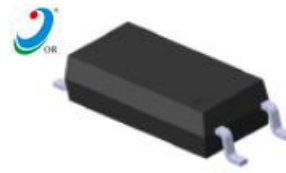

Pin Configuration

- 1. Anode
- 2. Cathode
- 3. Emitter
- 4. Collector

°C °C

2.

The OR-10XX series devices consist of an infrared emitting diode, optically coupled to a phototransistor detector. They are packaged in a 4-pin SOP package.

3.

(2 °C

Parameter		Symbol	Rated Value	Unit
Input	Forward Current	I_F	60	mA
	Junction Temperature	T_J	125	°C
	Reverse Voltage	V_R	6	V
	Consume Power	P	100	mW
Output	Collector and emitter Voltage	V_{CEO}	80	V
	Emitter and collector Voltage	V_{ECO}	7	
	Collector Current	I_C	50	mA
	Consume Power	P_C	150	mW
Total Consume Power		P_{tot}	250	mW
*1 Insulation Voltage		V_{iso}	5000	Vrms
Working Temperature		T_{opr}	-55 to + 110	°C
Deposit Temperature		T_{stg}	-55 to + 125	
*2 Soldering Temperature		T_{sol}	260	


Notes

*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

* 2 For 10 seconds


Parameter		Symbol	Condition	Min	Typ.*	Max	Unit
Input		V_F	$I_F=50\text{mA}$	---	1.25	1.6	V
		I_R	$V_R=4\text{V}$	---	---	10	μA
		C_t	$V=0, f=1\text{MHz}$	---	50	---	pF
Output		I_{CEO}	$V_{CE}=20\text{V},$ $I_F=0\text{mA}$	---	10	100	nA
		BV_{CEO}	$I_C=1\text{mA}$ $I_F=0\text{mA}$	80	---	---	V
		BV_{ECO}	$I_E=0.1\text{mA}$ $I_F=0\text{mA}$	7	---	---	V
Transforming Characteristics		CTR	$I_F=5\text{mA}$ $V_{CE}=5\text{V}$	50	---	600	%
		I_C		2.5	---	30	mA
		$V_{CE(sat)}$	$I_F=10\text{mA}$ $I_C=1\text{mA}$	---	---	0.3	V
		R_{iso}	DC500V 40~60%R.H.	10^{12}	---	---	Ω
		C_f	$V=0, f=1\text{MHz}$	---	0.3	---	pF
		t_r	$V_{CC}=5\text{V},$ $I_C=2\text{mA}$ $R_L=100\Omega$	---	3	18	μs
		t_f		---	4.7	18	μs

					°C
					°C
					°C

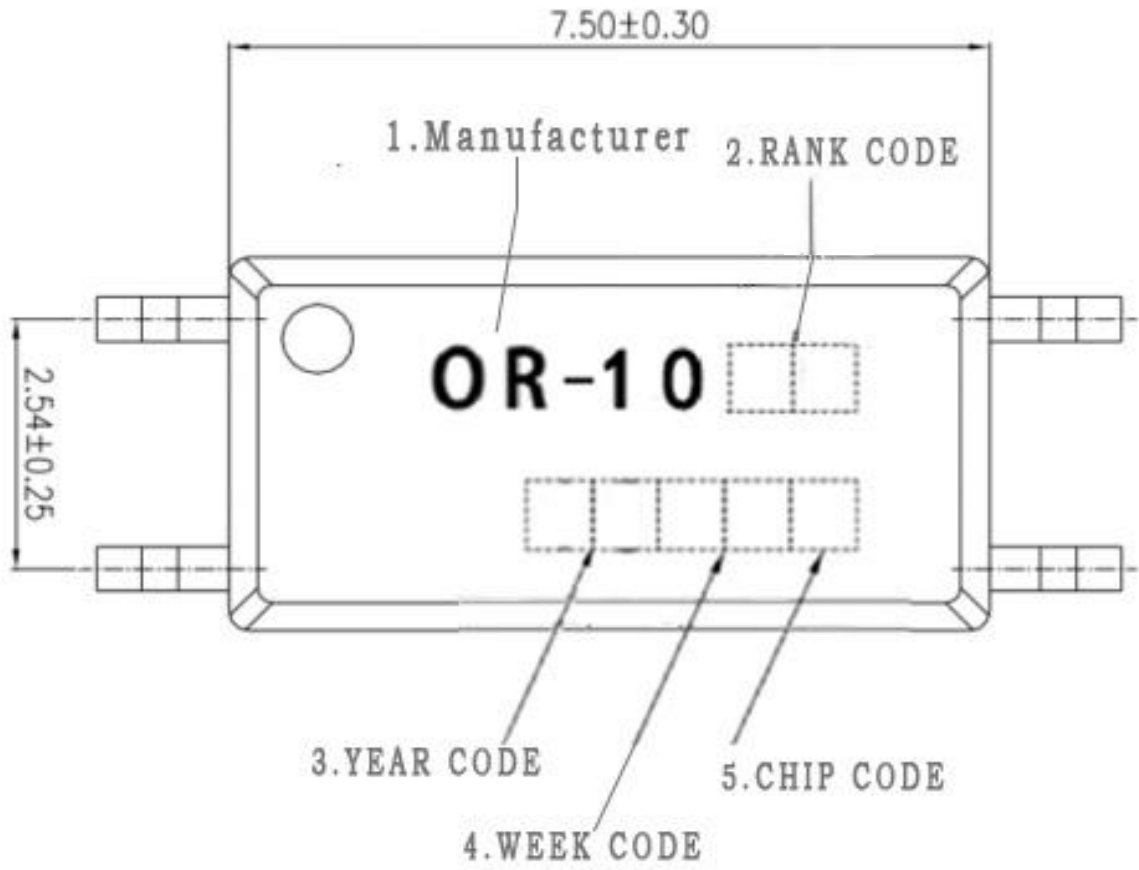


注:

-
-
-
-

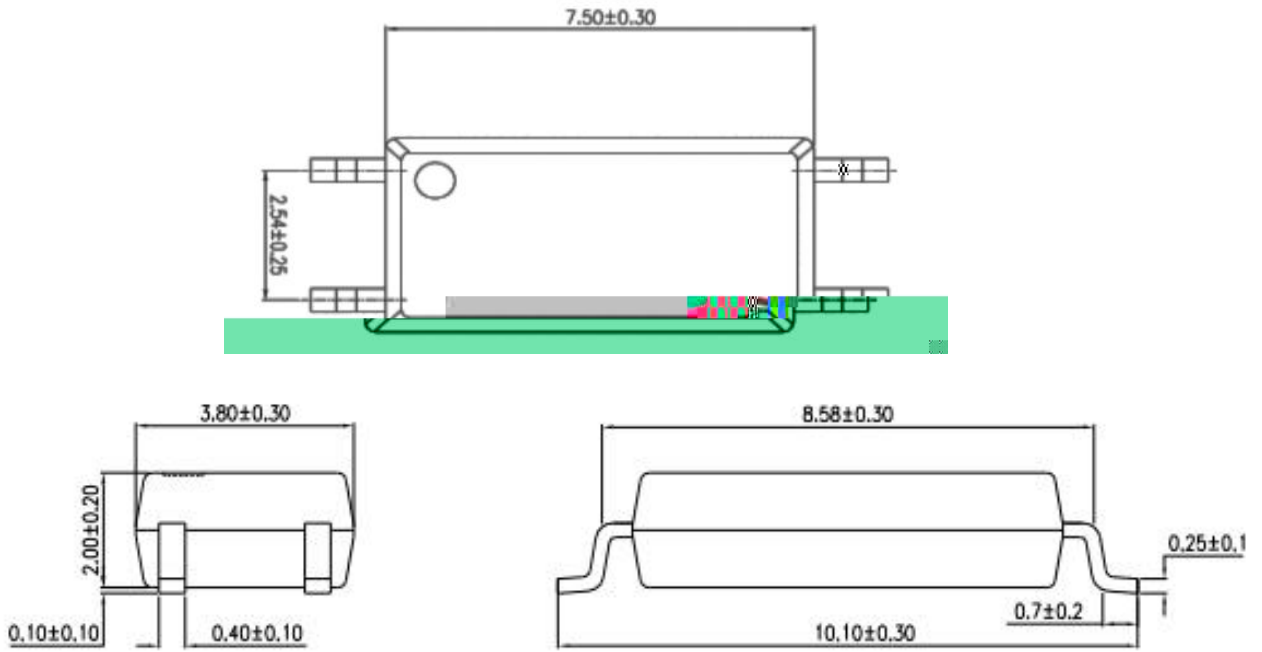


()

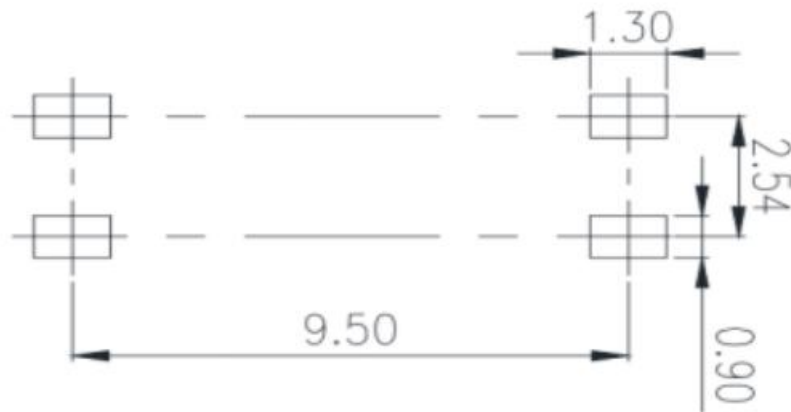


10.

(1) -10 -

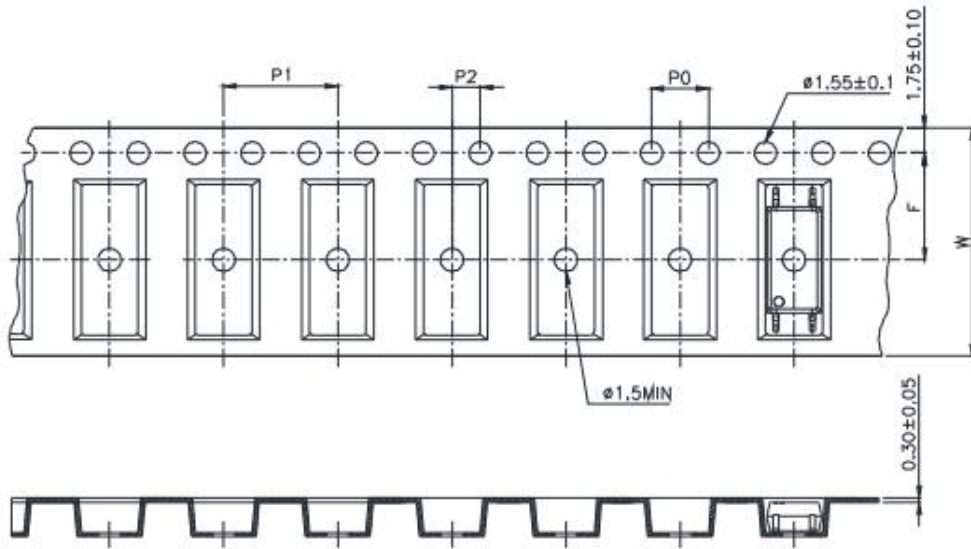


(2) -10 - 1

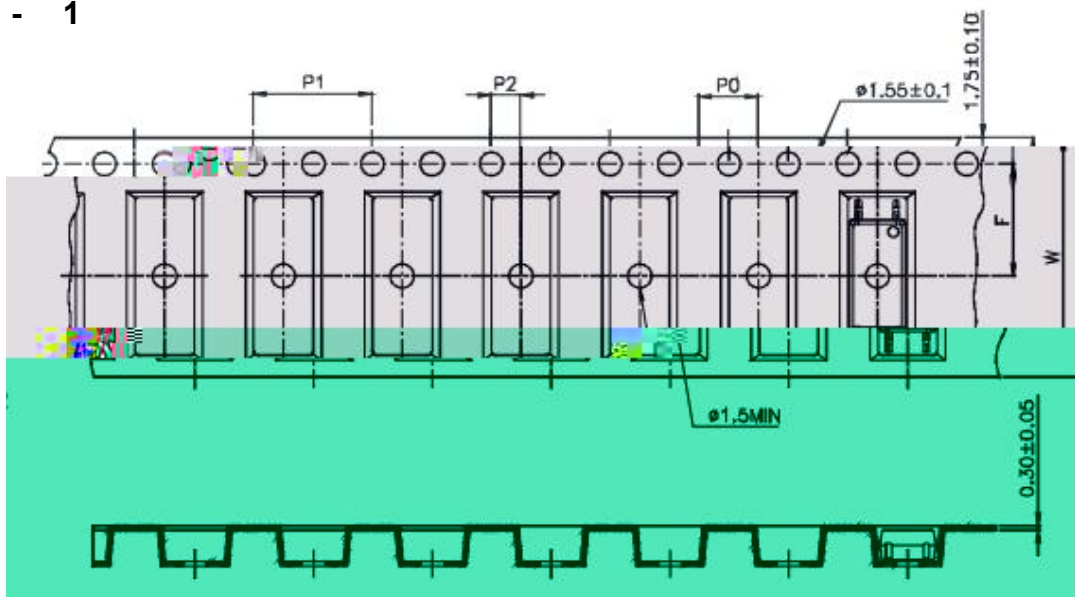

11.

(1). (- -020)

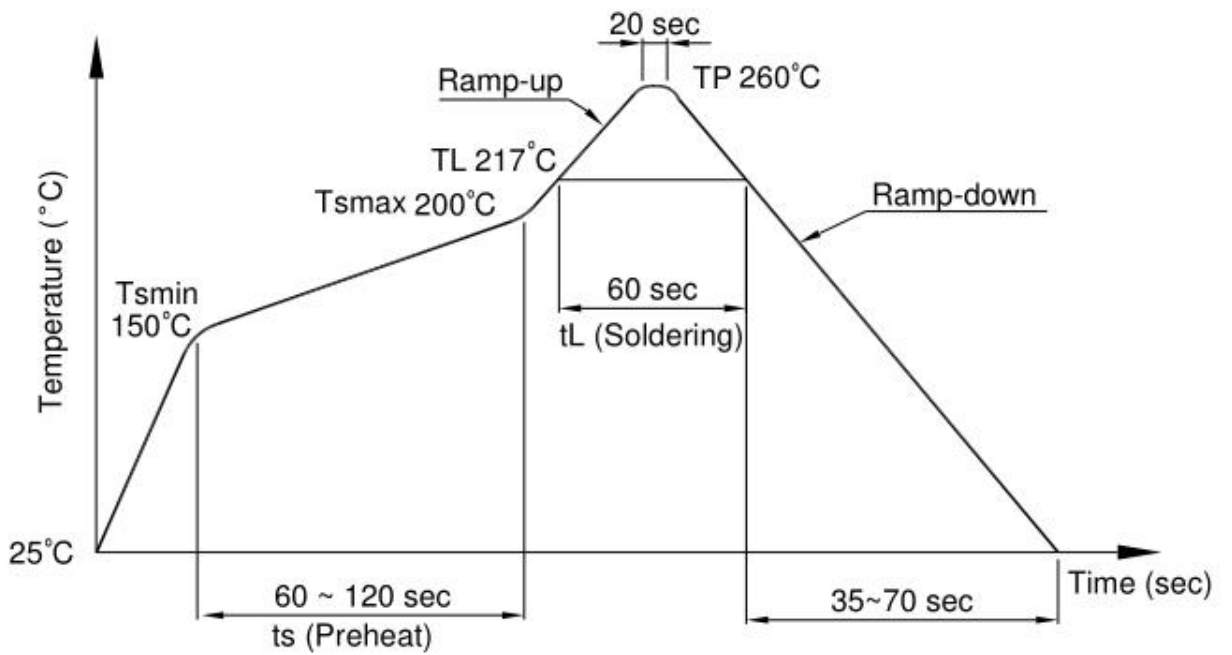



OR-10XX

12.

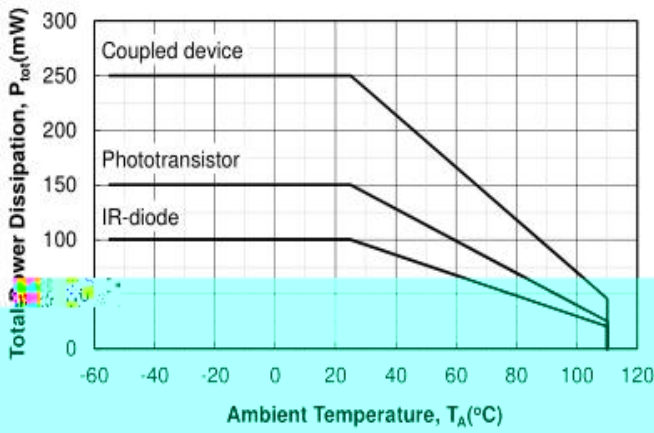


Figure 1. P_{tot} vs. T_A

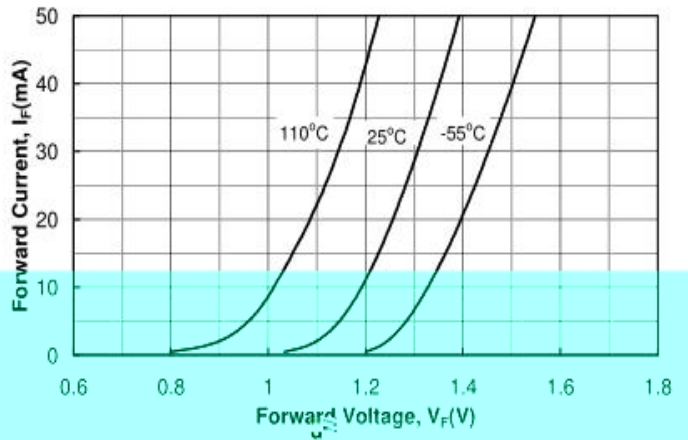


Figure 4. I_F vs. V_F

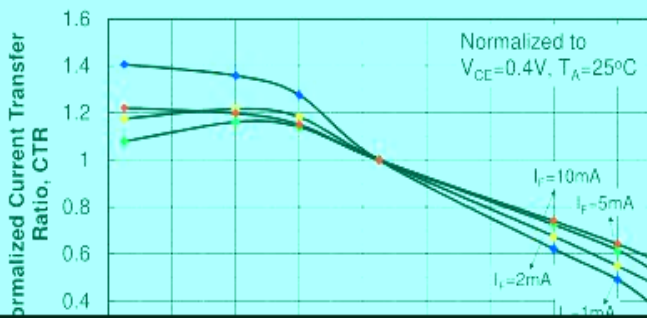


Figure 3. Non-saturated Normalized CTR vs. T_A

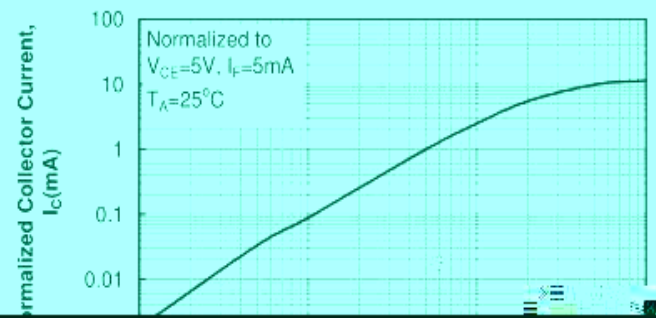
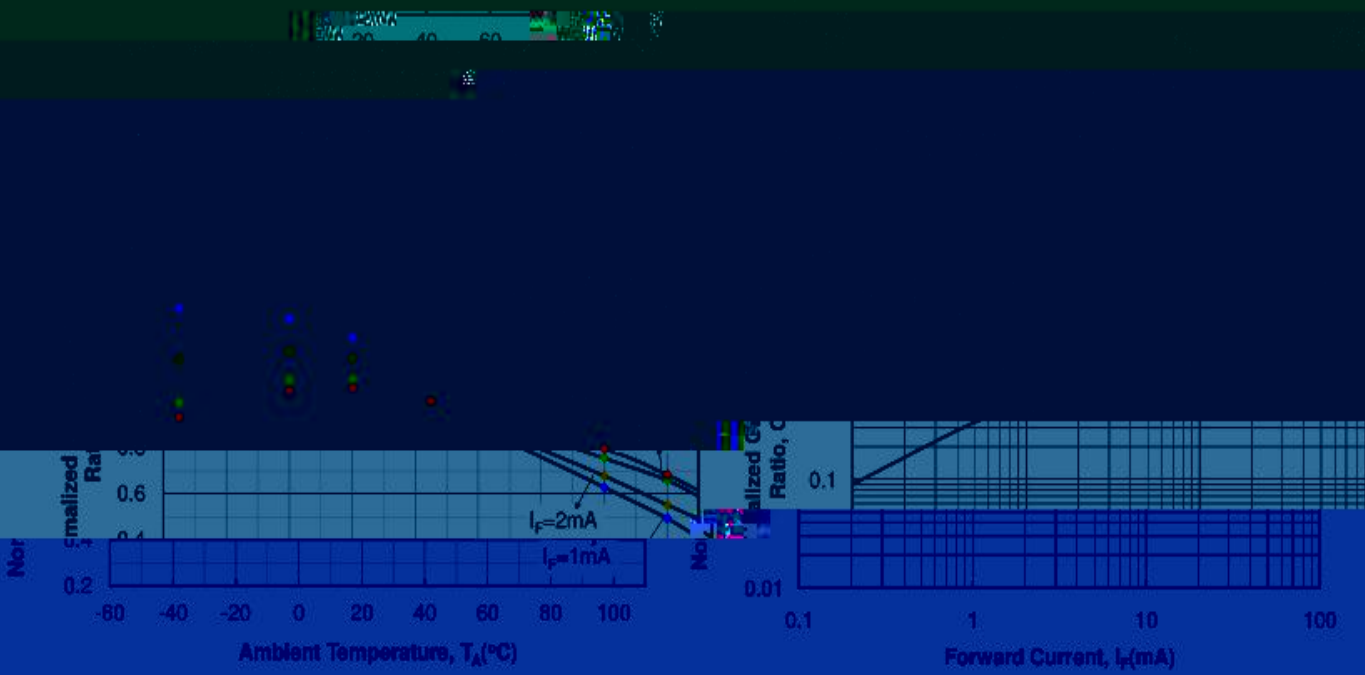


Figure 6. Normalized CTR vs. I_F



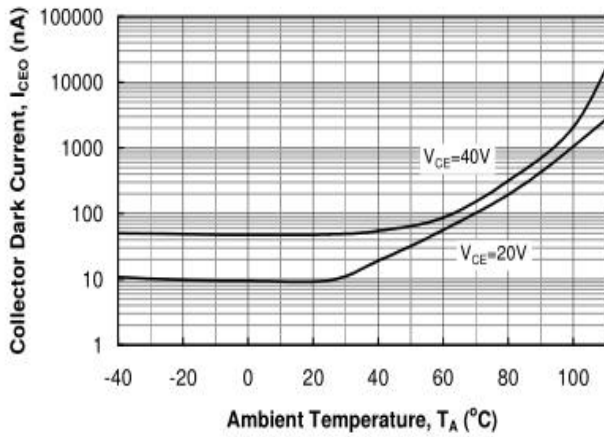


Figure 7. I_{CEO} vs. T_A

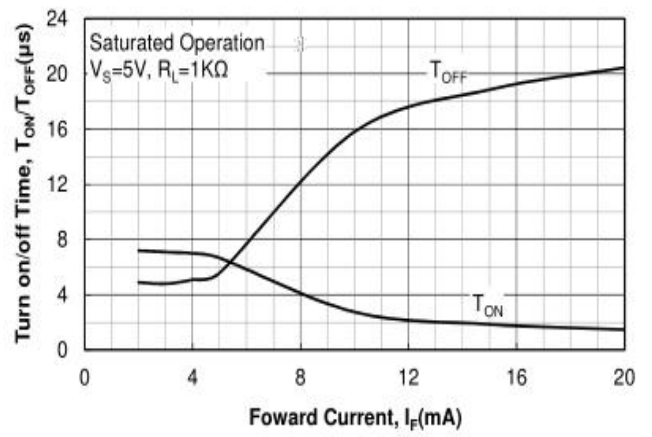


Figure 10. T_{ON} / T_{OFF} vs. I_F

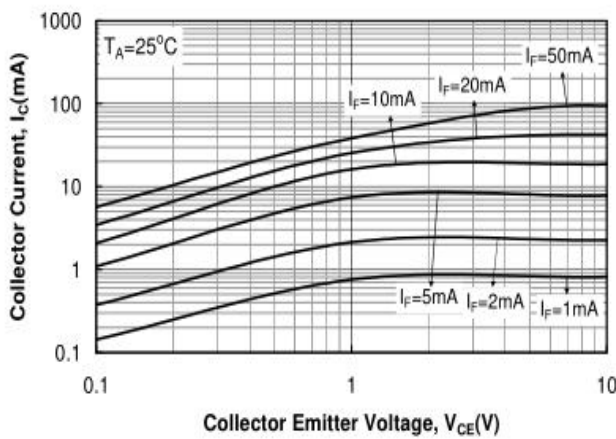


Figure 8. I_C vs. V_{CE}

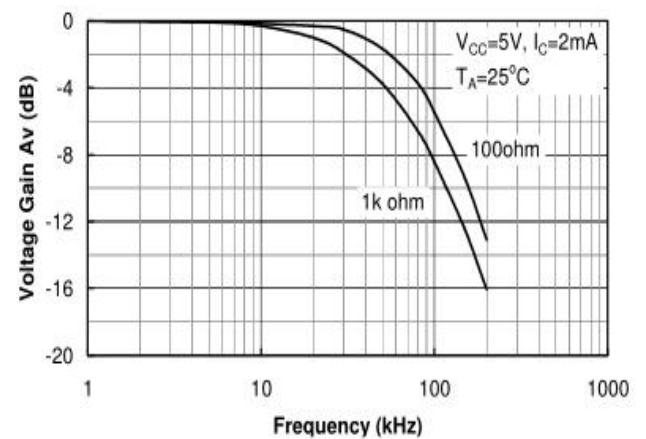


Figure 11. Frequency Response

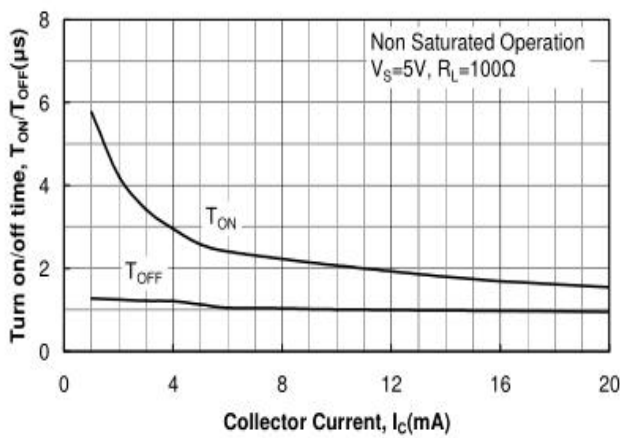


Figure 9. T_{ON} / T_{OFF} vs. I_C

