


Features:

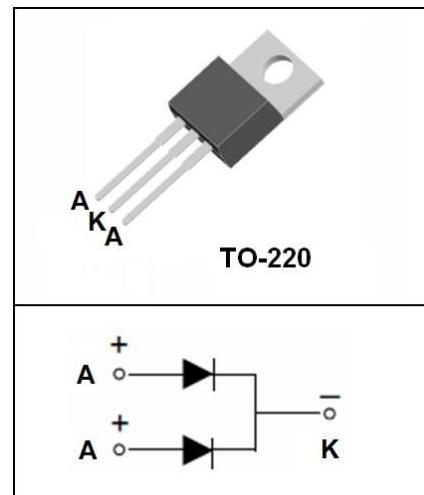

Application:

Absolute Maximum Ratings(2 °)

Symbol	Parameter	Value	Unit
		100	
		100	
()	, 120°C	() 10()	
	, .3	100	
		1 0	°
		- +1 0	°

Thermal Characteristics(2 °)

Symbol	Parameter	Max	Unit
	,	2.	° /
	,	10	° /

Electrical Characteristics(2 °)

Symbol	Parameter	Test Conditions	Min	Max	Unit
		100	100		
		100 2 ° 100 12 °		0.1	
		2 ° 12 °		0. 0.	
		10 2 ° 10 12 °		0. 0.	

Typical Performance Characteristics

Figure 1. Forward Current Characteristics

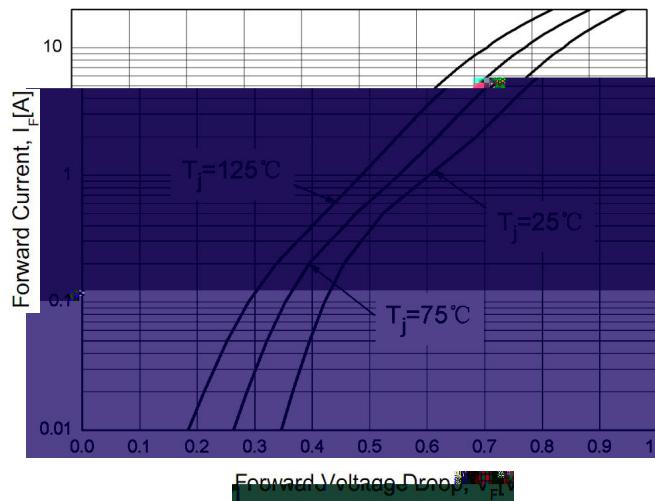


Figure 2. Reverse Leakage Current

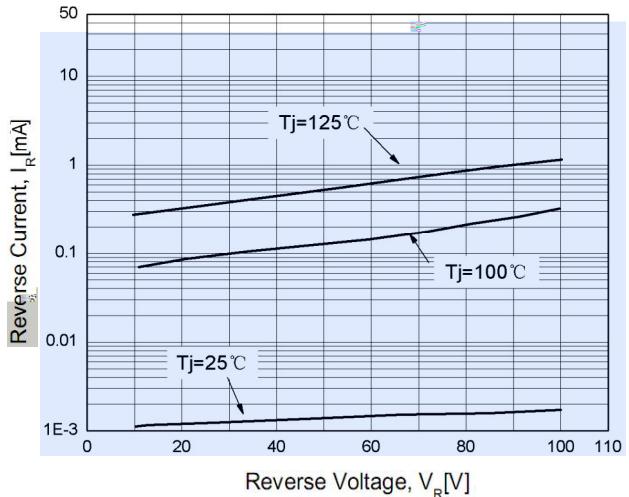


Figure 3. Junction Capacitance


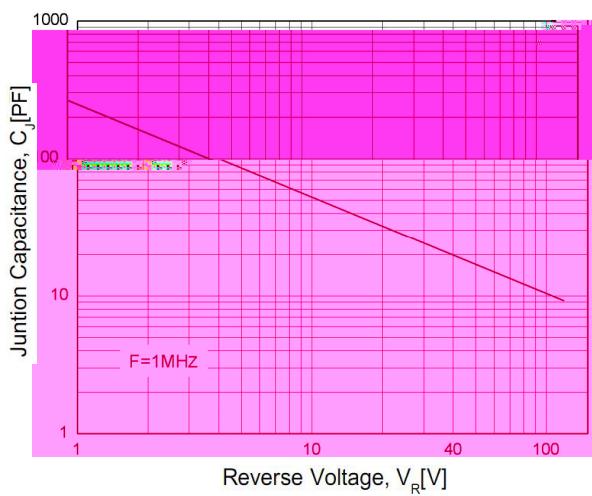


Figure 4. Power Derating



TO-220 MECHANICAL DATA

	.00	.0	.0		10. 0
	1.1	1.		2.	
1	0. 0	1. 0	1.10		1. 0
1	0.	0.	12. 0		1 . 0
	0.30	0. 0	1	2. 0	3. 0
	1 . 0	1 . 0		2. 0	3.10
1	. 0	. 0	1	2.00	3.00
				3. 0	.00

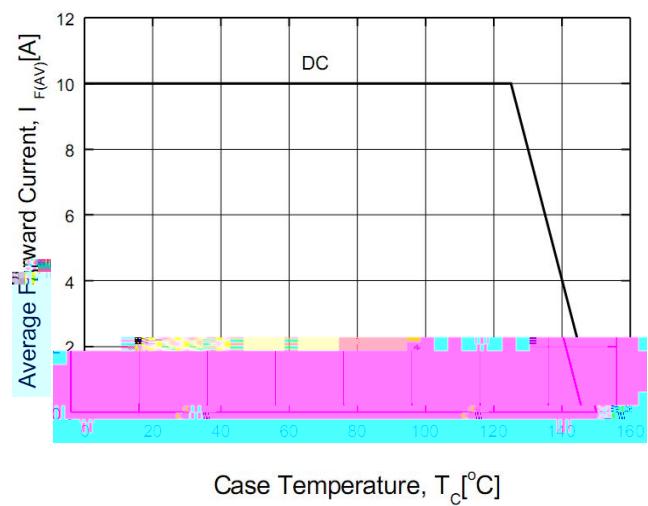