



5. Electrical Optical Characteristics at Ta=25°C


50	---	1.25	1.6
4	---	---	10
0, 1	---	50	---
20 0	---	10	100
1 0	0	---	---
0.1 0	7	---	---

11T1P1TUF214188101F5795997106701671331220TD11T1304-#21301d
27-2.88.66-78031909D11(F)1939134.3D1(O)1D112179705.51




6. Rank Table of Current Transfer Ratio

7.Naming Rule

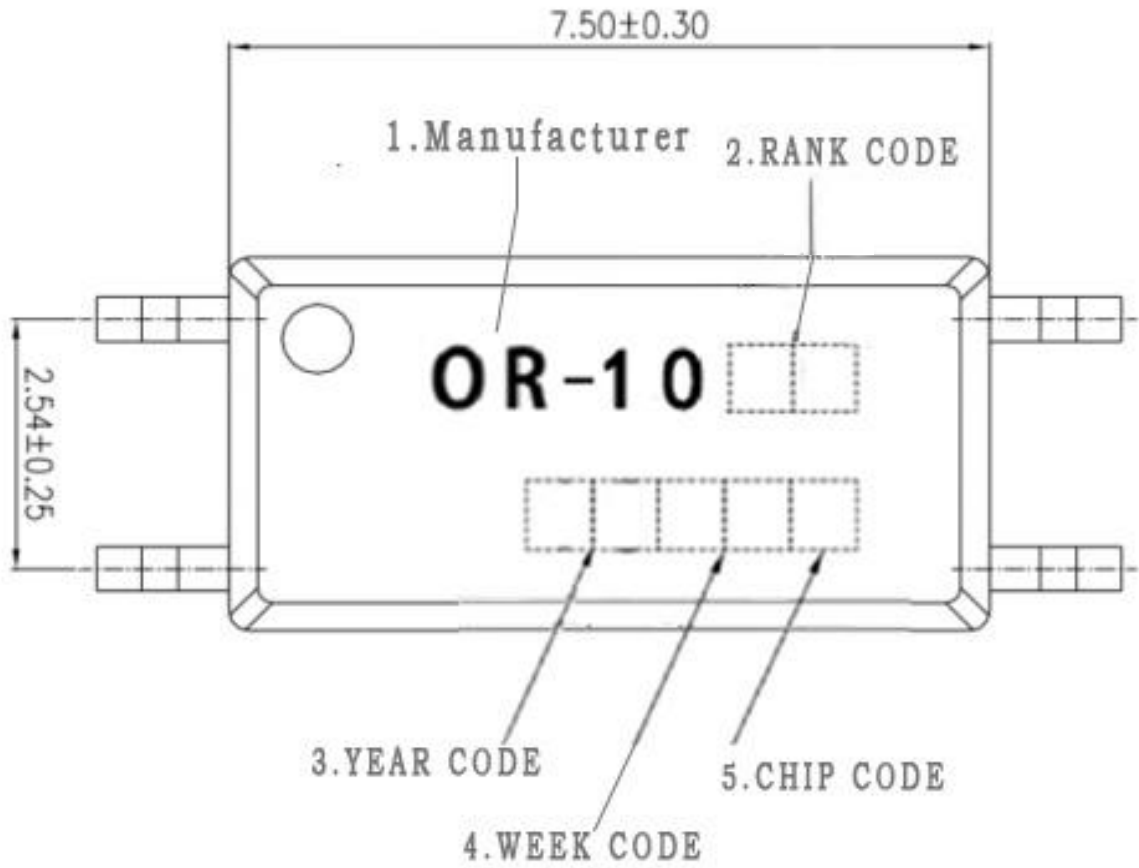

8. Package Dimension

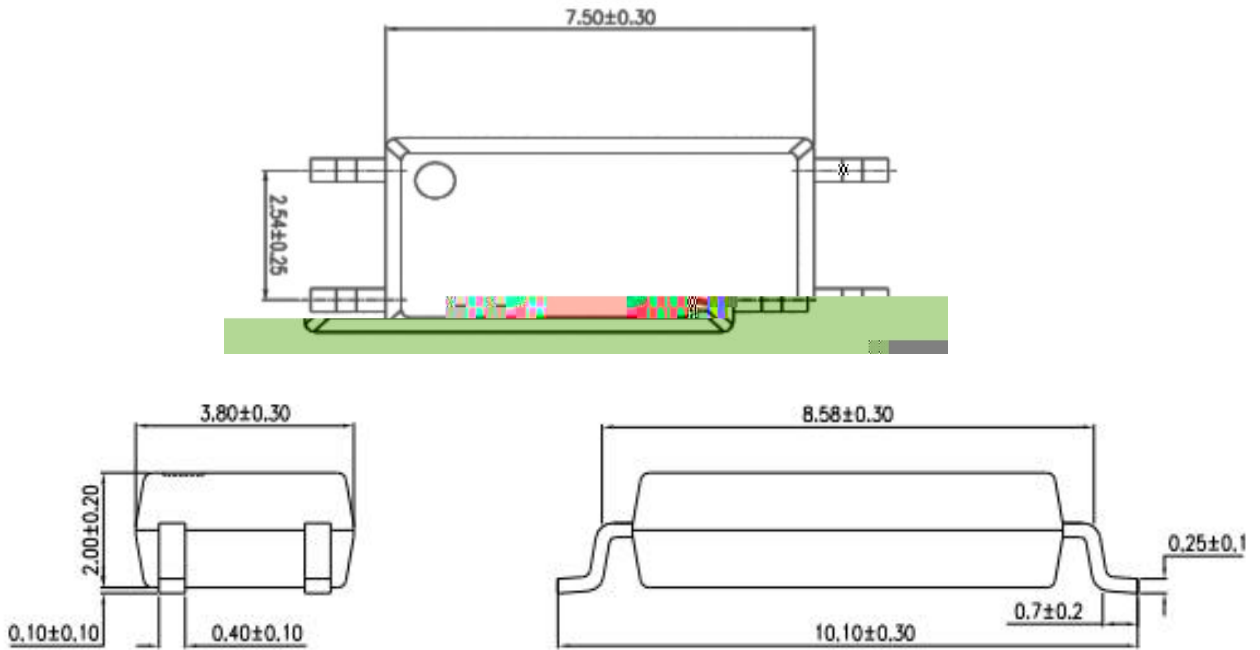

9. RECOMMENDED FOOT PRINT PATTERNS (MOUNT PAD)

