


Features:

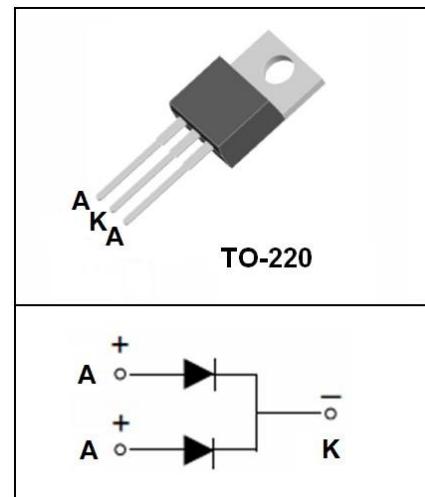

Application:

Absolute Maximum Ratings(2 °)

Symbol	Parameter	Value	Unit
		100	
		100	
()	, 120°C	10() 20()	
	, .3	1 0	
		1 0	°
	- +1 0	1 0	°

Thermal Characteristics(2 °)

Symbol	Parameter	Max	Unit
	,	2.2	° /
	,	2	° /

Electrical Characteristics(2 °)

Symbol	Parameter	Test Conditions	Min	Max	Unit
		100	100		
		100 2 ° 100 12 °		0.1	
		10 2 ° 10 12 ° 20 2 ° 20 12 °		0. 0. 1.0 0.	

Typical Performance Characteristics

Figure 1. Forward Current Characteristics

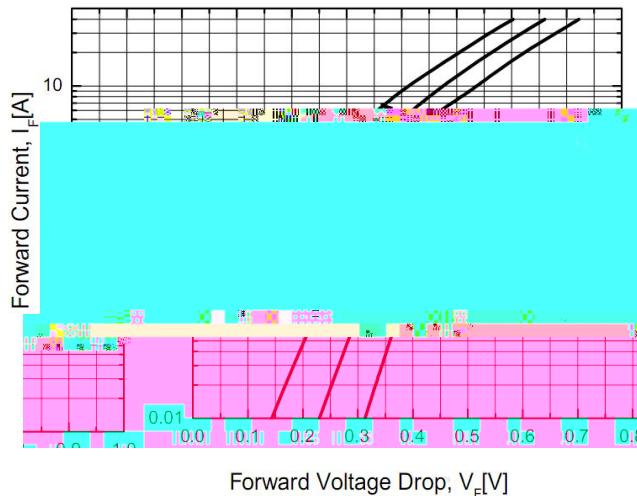


Figure 2. Reverse Leakage Current

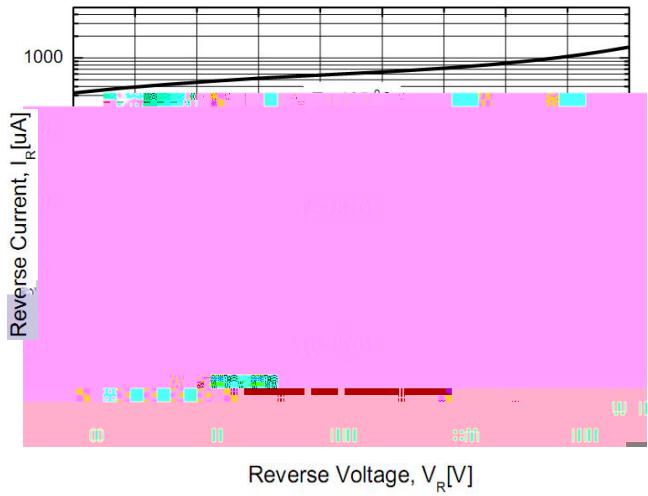


Figure 3. Junction Capacitance


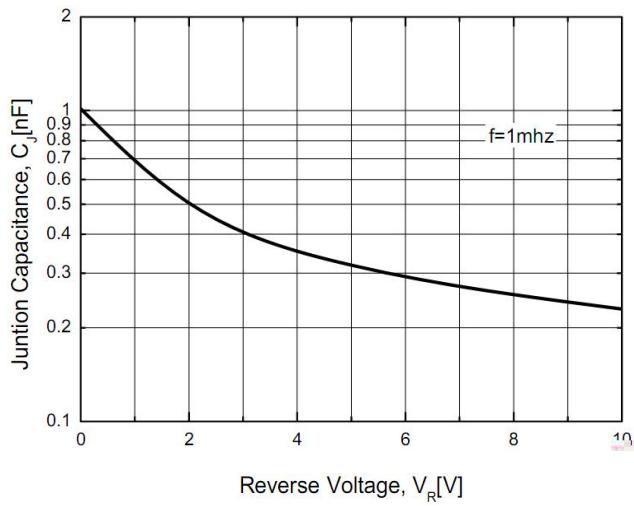


Figure 4. Power Derating



TO-220 MECHANICAL DATA

							:
	.00		. 0		. 0		10. 0
	1.1		1.			2.	
1	0. 0		1. 0		1.10		1. 0
1	0.		0.		12. 0		1 . 0
	0.30		0. 0	1	2. 0	3. 0	3. 0
	1 . 0		1 . 0		2. 0		3.10
1	. 0		. 0	1	2.00		3.00
					3. 0		.00

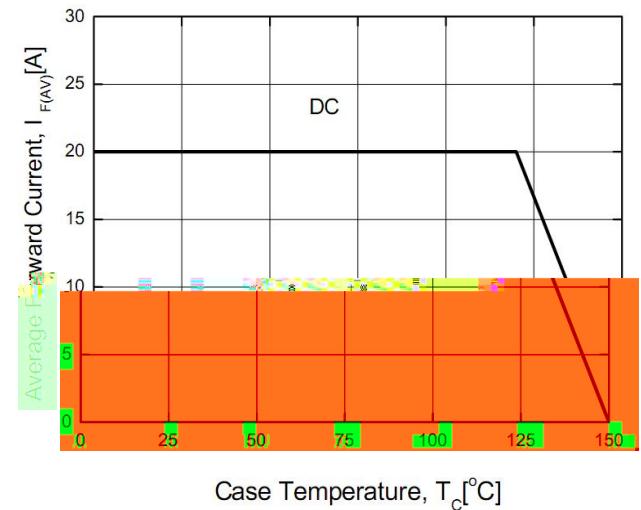